




**Roto pumps**  
since 1968 >>>

WE COMPETE  
WITH ONLY  
ONE PUMP >>>



**Roto pumps**  
since 1968 >>>

## ROTO PUMPS LTD.

### Regd. Off. & Global Headquarters

13, Roto House, Noida Special Economic Zone,  
Noida-201305, UP, India  
Tel: +91 120 2567902-5, Fax: +91 120 2567911  
Email: [contact@rotopumps.com](mailto:contact@rotopumps.com)  
CIN: L28991UP1975PLC004152

### Overseas Establishments

**Roto Pumps Ltd., UK**  
Email: [sales@rotopumps.co.uk](mailto:sales@rotopumps.co.uk)  
Web: [www.rotopumps.co.uk](http://www.rotopumps.co.uk)

**Roto Pumps Africa (Pty.) Ltd.**  
Email: [sales@rotopumps.co.za](mailto:sales@rotopumps.co.za)  
Web: [www.rotopumps.co.za](http://www.rotopumps.co.za)


**Roto Pumps Ltd., Australia**  
Email: [sales@rotopumps.com.au](mailto:sales@rotopumps.com.au)  
Web: [www.rotopumps.com.au](http://www.rotopumps.com.au)

**Roto Pumps GmbH**  
Email: [sales.rpg@rotopumps.com](mailto:sales.rpg@rotopumps.com)  
Web: [www.rotopump.de](http://www.rotopump.de)

**Roto Pumps North America Inc.**  
Email: [sales@rotopumpsna.com](mailto:sales@rotopumpsna.com)  
Web: [www.rotopumpsna.com](http://www.rotopumpsna.com)

**Roto Pumps (Malaysia) Sdn. Bhd.**  
Email: [salesmy@rotopumps.com](mailto:salesmy@rotopumps.com)  
Web: [www.rotopumps.com.my](http://www.rotopumps.com.my)


[www.rotopumps.com](http://www.rotopumps.com)

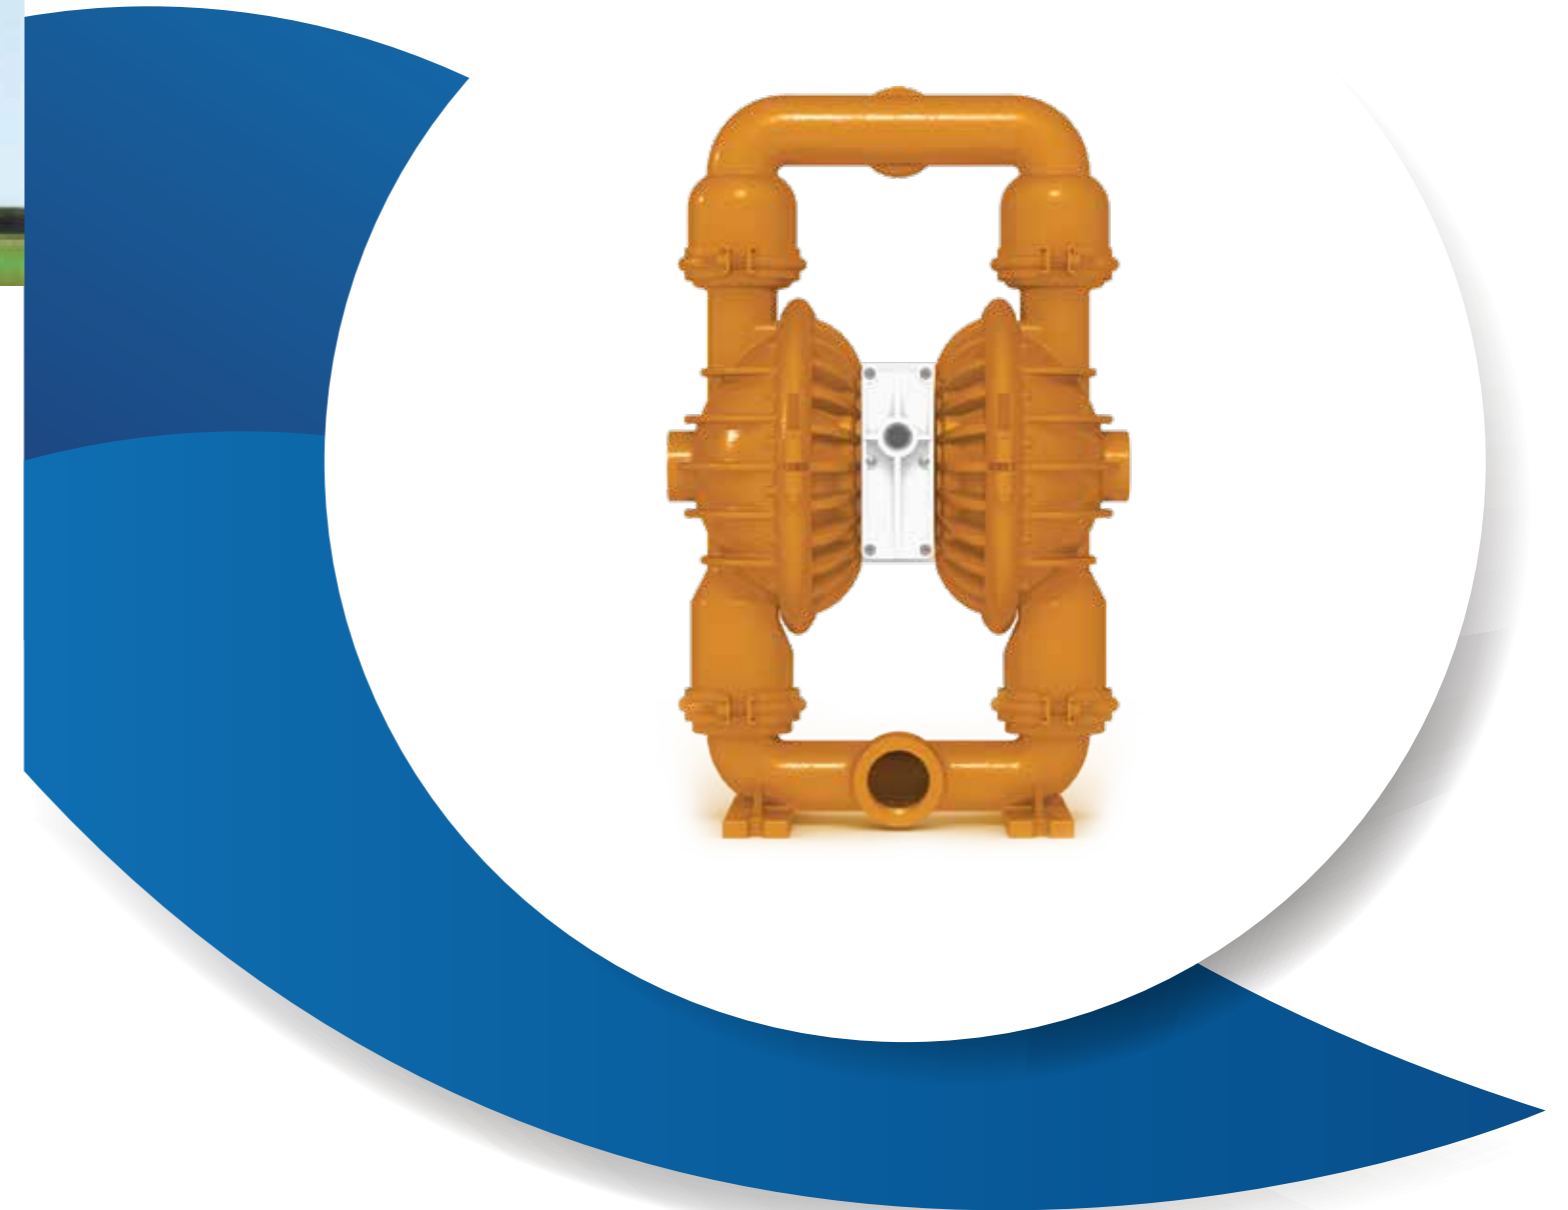

## Air Operated Double Diaphragm Pumps

Harnessing the Power of Air

## Air Operated Double Diaphragm Pumps

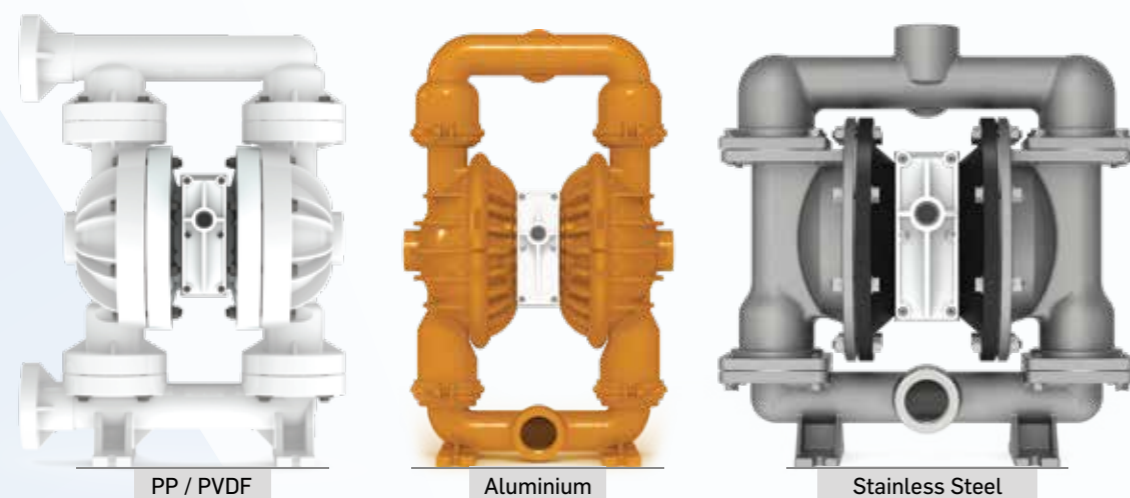

Roto's range of air operated double diaphragm pumps are positive displacement pumps, driven by compressed air rather than an electric motor. Roto AODD Pumps are corrosion-resistant and are used to handle fluids with low to medium viscosity, including aggressive chemicals and liquids with high solids content. These innovative pumps are an ideal choice for meeting your demands for high efficiency and low maintenance cost.

### Features and Benefits

- Low noise
- Low vibrations
- Excellent abrasive liquid resistance
- Very compact design
- Up to 35% lower air consumption
- Operating in each position

- Dry running capability
- Low maintenance cost
- High stroke frequency i.e. low liquid pulsation
- Material choice for machined pump body
- Standard PTFE/Rubber backup diaphragm

### Accessories

- Liquid level controllers
- Air preparation
- Hoses
- Valves

## Performance Summary

Series	Polypropylene/PVDF	Stainless steel 316	Aluminium
Max. Pressure (Bar)	8	8	8
Max. Suction Lift Dry (m)	3	3	3
Max. Suction Lift Wet (m)	7	7	7
Max. Temp. Pump (Deg. C)	100	100	100
Max. Viscosity (cSt)	10000	10000	10000

## Material Options Summary

PUMP HOUSING	SIZE	BOLTED (B) / CLAMPED (C)	DIAPHRAGM	NRV BALL	MAX. FLOW (LPM)	MAX. SOLID SIZE (MM)
POLYPROPYLENE	1/2"	B	TEFLON / NEOPRENE / SANTOPRENE	TEFLON	55	1.6
	1"	B		TEFLON / NEOPRENE	133	3.7
	1.5"	B			450	4.8
		C			700	6.4
	2"	B	1000	12		
	3"	B	TEFLON / SANTOPRENE			
PVDF	1/2"	B	TEFLON	TEFLON	55	1.6
	1"				133	3.7
	1.5"				450	4.8
	2"				700	6.4
SS316	1/2"	C	TEFLON	TEFLON	55	1.6
	1"	B			133	3.7
	1.5"				450	4.8
	2"				700	6.4
	3"				1000	12
ALUMINIUM	1/2"	B	TEFLON / BUNA	TEFLON	55	1.6
	1"		TEFLON / BUNA / SANTOPRENE	TEFLON / BUNA / NEOPRENE	133	3.7
	1.5"		TEFLON / BUNA	TEFLON / BUNA	450	4.8
	2"		TEFLON / BUNA / SANTOPRENE / HYTREL	TEFLON / BUNA / NEOPRENE	700	6.4
	3"				1000	12

\*Note:

- Other sizes are Available on Order.